



ONE HOUR BELTING

Reduced Inventory for Customer

- On the Shelf Slit to Width
- Available on Demand from MWR Stock
- Reduction of Customer In-House Inventory

Shortened Lead Time

- Belts Ready to Ship in 1 Hour or Less (When ordered before 3 p.m.)

Standardization (Consistency)


- Pick and Choose from MWR List
- Customization of High Demand Belts (KANBAN inventory)
- Consistant Coil Lengths vs. Random Factory Lengths
- Standard in Stock Widths

Product & Services with Extended Lead Times

- Presses – Tools
- V-Guiding
- Vacuum or Perforations
- Conveying – Feeder Belts
- Splice Training
- On-site Installation

Splice Types

1. Thermofix
2. Flexproof
3. Quickmelt

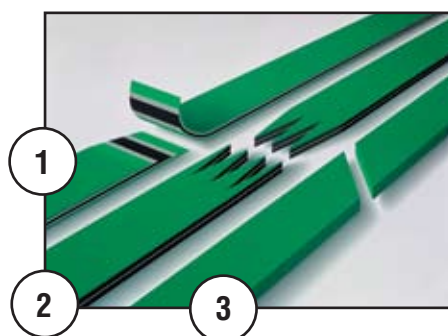

Technical Data

Belt Style	Belt Thickness	Cover Material	Bottom Material	Admissible Force (Lbs Piw)	Minimum Pulley Diameter	Temperature Range	Stocked Widths	Stocked Lengths	Splice Type
HAM-5P	.04"	NBR	NBR	45.7	0.6"	(-4/212 F)	0.629"	300 ft.	Thermofix
							0.75"	50/100/300ft	
							0.787"(20mm)	300 ft	
							1.0"	50 / 300 ft	
							1.181"(30mm)	300 ft	
							1.50"	300 ft	
							1.562"	300 ft	
1.547"(40mm)	300 ft								
MAM-5P	.05"	NBR	Hamid	71.4	0.8"	(-4/140 F)	0.625"	100 ft.	Quickmelt or Flexproof
							0.75"	50/100/300ft.	
							0.787"(20mm)	300 ft.	
							1.0"	50/100/200/300ft	
							1.181"(30mm)	300 ft	
							1.25"	300 ft	
							1.50"	50/100/300ft	
1.547"(40mm)	300 ft								
MAT-5P	.06"	EPDM	Hamid	71.4	0.8"	(-4/212 F)	0.75"	100 / 300 ft	Quickmelt or Flexproof
							1.0"	50 / 100 ft	
							1.50"	100 / 300 ft	
MAT-02H	.06"	NBR	NBR	8.6	0.6"	(-22/140 F)	0.787"	300 ft	Quickmelt or Flexproof
							1.50"		
							1.968"(50mm)		
MAM-04H	.06"	NBR	TPU	17.1	0.6"	(-22/140 F)	1.0"	100 ft	Quickmelt or Flexproof
							1.5"	50 ft	
							1.968"(50mm)	200 ft	
F-1	.05"	NBR	NBR	45.7	1.0"	(-4/212 F)	0.75"	100 / 300 ft	Thermofix
							0.787"(20mm)	50 / 300 ft	
							1.0"	50/100/300ft	
MVT-6P *	.06"	PUR	NBR	91	.8"	(-4/140 F)	1.187"	100 ft	Flexproof
							0.75"		
							1.0"		
							1.187"		
TS-10	.03"	PA	PA	20	.6"	(-4/212 F)	1.0"	100 ft	Thermofix
							1.0", 1.5"	200 ft	
							1.0", 1.25", 1.5"	100 ft	
W-16 *	.03"	TPU	PET/CO	40	.6"	(-4/140 F)	1.0", 1.25", 1.5"	100 ft	Flexproof

* MVT-6P is the finger splice version of HAM-5P and F-1

* W-16 is the finger splice version of the TS-10

All data are approximate values.


Other Midwest Rubber Products
visit: www.midwestrubber.com



PQ-58



PT-100



Extruded Belts



Seamless Belts



Machine Tape

CALL TODAY!
763-559-2551

MIDWEST RUBBER
SERVICE & SUPPLY CO.

14307 – 28th Place North
Minneapolis, MN 55447